

DIN Rail Conditioning Module

General purpose din rail mounted oscillator / demodulator modules for inductive transducers

Features

- Range selectable to ± 10 VDC
- Range selectable to ± 20 mA
(example: 0-20 mA, 4-20 mA)
- DC powered (10 to 30 VDC)
- LVDT and Half Bridge variants
- Good Linearity



Description

The DIN Rail Conditioning Module (DRC) is a DC powered conditioning module that can accept a wide range of analogue inductive transducer types due to its wide input gain. The signal polarity, span and offset are adjustable providing ± 10 VDC voltage output or ± 20 mA current output. The module housing is a standard DIN rail enclosure which can clip directly to a 35 mm top hat rail (TS35 EN50022) as shown in the mechanical outline below.

The transducers are connected using screw terminals to the front of the DRC. Set-up and adjustments are made using a combination of internal links and front panel mounted fine adjustment potentiometers.

By linking two DRC modules, users can also perform some analogue arithmetic on two signals such as A+B, A-B, (A+B)/2 and (A-B)/2.

Mechanical Outline

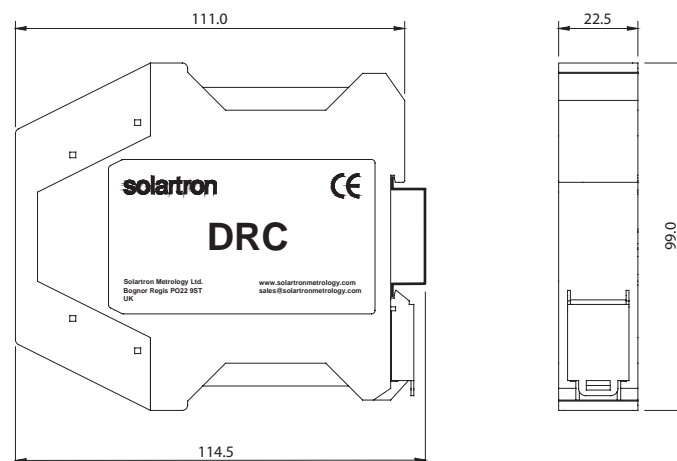


Diagram showing general dimensions of DRC (dimensions in mm)

Technical Specification

Power Requirement

Voltage Range	10 to 30 VDC
Current Range	160 mA at 10 V to 70 mA at 30 V

Transducer Excitation

Primary Voltage	3 V rms nominal
Primary Frequency	5 kHz, 10 kHz or 13 kHz link selectable

Signal Input (Transducer Sensitivity Range)

Input Range	55 mV to 5000 mV LVDT full range
Input Load Resistance	100 k Ω , 2 k Ω
Options	See note ¹

Signal Output

Voltage Output	Up to ± 10 VDC
Current Output	Up to ± 20 mA into 150 Ω load
Output Ripple	<1 mV rms
Output Offset	Up to 100% (course & fine adjustment ²)
Temp. Co. Gain	<0.01% FRO/ $^{\circ}$ C
Temp. Co. Offset	<0.01% FRO/ $^{\circ}$ C
Warm-up	15 minutes recommended
Linearity	<0.1% FRO
Bandwidth (-3 dB)	500 Hz, 1 kHz link selectable

Environmental

Operational Temperature Range	0 to 60 $^{\circ}$ C (32 to 140 $^{\circ}$ F)
Storage Temperature Range	-20 to 85 $^{\circ}$ C (-4 to 185 $^{\circ}$ F)

Mechanical and Connections

Transducer	Screw terminals
Power Supply	Screw terminals
Output Signal	Screw terminals
Enclosure (size)	114.5 x 99 x 22.5 mm
Weight	120 g
Material	Green polyamide


Notes

¹ No input options are offered. As connection of transducer is by screw terminal, additional internal configuration methods are not required. By changing connections and use of external components, the user can perform:

- Change input polarity
- Half Bridge connection
- Grounding one side of the input
- Phase correction
- Quad resistors.

² Fine adjustment via the front panel.

Applications







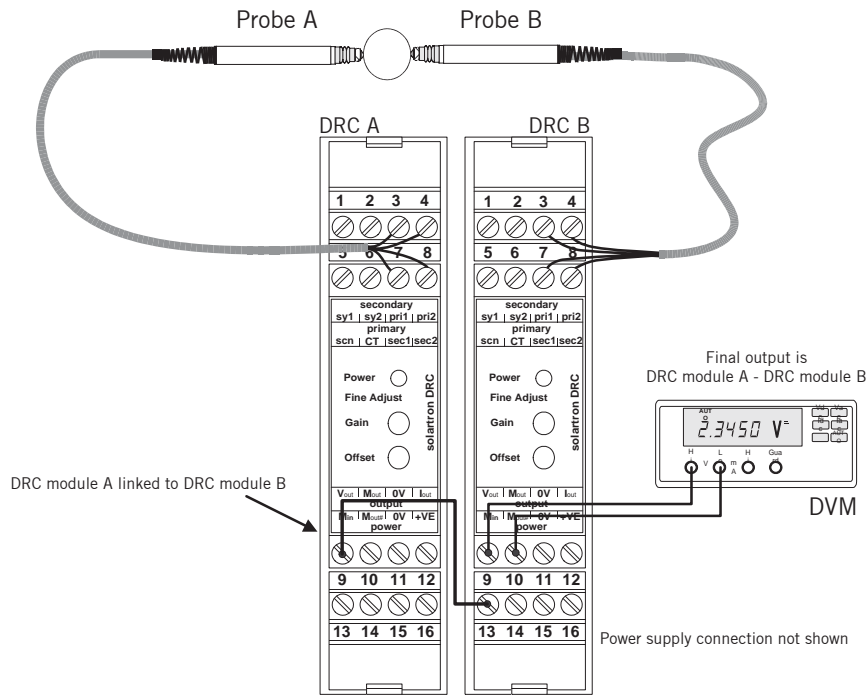


Example of a paired arrangement of DRCs in an A-B gauging application

Ordering Guide

Product	Part Number
Din Rail Conditioning Module (DRC)	911337
Din Rail Conditioning Module (DRC) set up	911344

Also Available at Solartron Metrology



Solartron Metrology Offices

Addresses for Offices worldwide

United Kingdom - Head Office

Solartron Metrology
Steyning Way
Bognor Regis
West Sussex
PO22 9ST

Tel: +44 (0) 1243 833333
Fax: +44 (0) 1243 833332
sales.solartronmetrology@ametek.com

Germany
Ametek GmbH
Solartron Metrology Division
Rudolf-Diesel-Strasse 16
40670 Meerbusch

Tel: +49 (0) 2159 9136 500
Fax: +49 (0) 2159 9136 505
vertrieb.solartronmetrology@ametek.com

France
Solartron Metrology
Rond-point de l'Epine des Champs
Buroplus - Bat D
Elancourt, 78990

Tel: +33 (0)1 30 68 89 50
Fax: +33 (0)1 30 68 89 59
france.solartronmetrology@ametek.com

China - Shanghai
Solartron Metrology
Rm 912, Metro Tower
No 30 Tian Yao Qiao Road, Shanghai
200030

Tel: +86 21 6426 8111
Fax: +86 21 6426 7818
china.solartronmetrology@ametek.com

China - Beijing
Solartron Metrology
Room 2202, CITIC Building
#19, Jianguomenwai Dajie
Beijing
100004 P.R China

Tel: +86 10 8526 2111
Fax: +86 10 8526 2141
china.solartronmetrology@ametek.com

China - Chengdu
Solartron Metrology
AMETEK ChengDu Rep Office
Room 2408, Zongfu Building
35 Zongfu Road
Chengdu, Sichun, 610016, China

Tel: +86 28 8675 8111
Fax: +86 28 8675 8141
china.solartronmetrology@ametek.com

Japan
Solartron Metrology
4-5-37 Kamiosaki
Shinagawa-Ku
Tokyo
141-0021

Tel: +81(0) 3 3494 5131
Fax: +81 (0) 3 3494 5134
japan.solartronmetrology@ametek.com

U.S.A
Solartron Metrology
915 N.New Hope Road
Suite C, Gastonia
NC 28054, USA

Tel: +1 800 873 5838
Fax: +1 704 868 8466
usasales.solartronmetrology@ametek.com

Agent and Distributor details available at www.solartronmetrology.com

